


# 3.5" AHD / CVI / TVI / 960H Test Monitor

## DA-AU35MACT

### FEATURES

- 3.5" TFT 480x235
- Support AHD / CVI / TVI / 960H signals
- Support UTC function
- Coaxial and Cat5 cable test
- Support PTZ control
- Data monitor for reading the command code
- Pixel Configuration: R.G.B.Delta
- Video System: NTSC/PAL auto switch
- Monitor Adjust: Contrast, Brightness, Color, Tint
- Battery: DC12V/2A
- Working Time: 3.5hrs
- Power Consumption: 400mA(4.8W)
- Protective Carrying Case

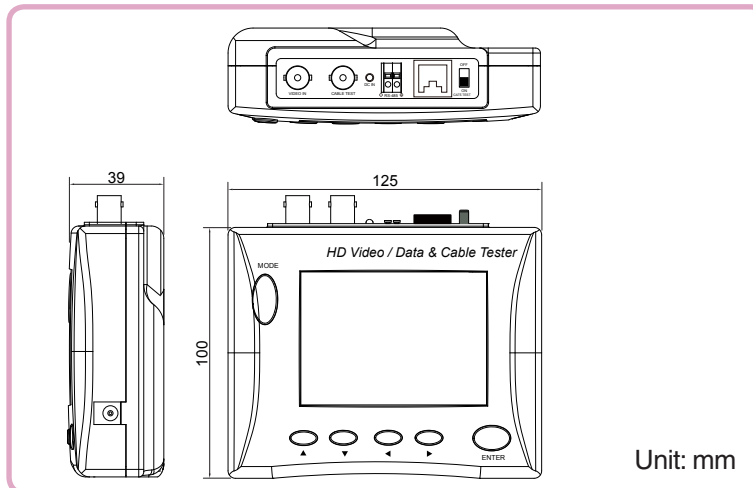

### SPECIFICATIONS

Panel Size	3.5" Color TFT
Resolution	480(H) x 235(V) Dot
Active Area	72.00(W) x 50.544(H) mm
Dot Pitch	0.150(H) x 0.216(V) mm
Pixel Configuration	R.G.B. Delta
View Angle	Top=10°, Bottom=30°, Lift=40°, Right=40°
Panel Dimension	83(W)x60.5(H)x3.2(D)mm
Back Light	LED Type
Video Input	AHD 3.0 / TVI 3.0 / CVI 2.0 / CVBS
Video Type	1.0Vp-p / 75Ω
Video System	NTSC / PAL Auto switch
Input Source	BNC connector x 1 RS-485 x 1
Input Voltage	DC 12V Regulator
Power Consumption	Normal: DC12V, 400mA (4.8W) Charge: DC12V, 1A (12W)°C
Working Time	3.5hr
Charge Time	5hr
Low Voltage Triggering	10.7 V
System Cut off Voltage	9.3 V
Keypad Control	6 Key (Mode / Up / Down / Left / Right / Enter Key)
Operation Temperature	0°C~50°C
Storage Temperature	-25°C~80°C
Dimensions (WxDxH)	125 x 100 x 39
Weight	310g